



# China PEOPLE pneumatic component

Pneumatic valve , Solenoid valve , Pneumatic component , China Pneumatic, Cylinders



World Machine 500 / China Top 500 / China Famous Trademark / China Top Brand

- [PEOPLE Pneumatic](#)
- [Product](#)
- [Valves](#)
- [Cylinder](#)
- [Pneumatic Component](#)
- [Air Preparation](#)
- [Pneumatic accessories](#)
- [News](#)
- [Tech Support](#)
- [Contact Us](#)

## 3V200 Series Solenoid Valve

[Pneumatic valves](#) > [Solenoid Valve](#) > 3V200 Series Solenoid Valve




View technical date of 3V200 Series Solenoid Valve with PDF

### Order code for 3V200 Series Solenoid Valve



3V	2	10	-	06	-	NO	-	AC110V
Model: 3V:3 port 2 positions solenoid valve	Code 2:200 Series	Valve type 10:single solenoid 20:double solenoid		" Port Size 06:1/8" 08:1/4"		Acting type NC:Normally closed NO:Normally open		Voltage DC12V DC24V AC24V 50/60Hz AC110V 50/60Hz AC220V 50/60Hz AC380V 50/60Hz

### Symbol for 3V200 Series Solenoid Valve

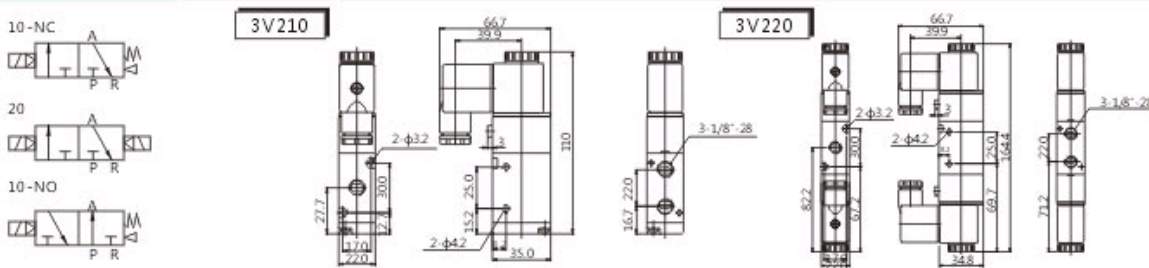

### Specifications for 3V200 Series Solenoid Valve

Model	3V210-06	3V220-06	3V210-08	3V220-08
Media	Air			
Action Style	Internally piloted			
Port size	In=Outer=1/4"		In=Outer=1/8"	
Type	3Port 2 position			
Temp.range	-5 60°C(23-140°F)			
Orifice size	14mm <sup>2</sup> (Cv=0.78)		16mm <sup>2</sup> (Cv=0.89)	
Lubrication	Not required			
Pressure range	0.15 0.8Mpa			
Proof pressure	1.2Mpa			
Power consumption	AC380V:2.5VA	AC220V:2.0VA	AC110V:2.5VA	AC24V:3.5VA DC24V:3.0W DC12V:2.5W
Protection	IP65(DIN 40050)			
Connection	Socket with plug			
Material	Aluminum alloy			
Max.frequency	5 cycles/per.sec.			
Insulation	F Class			
Voltage range	-15% +10%			
Min.Activate time	0.05sec			

### Pneumatic equipment directory

- [PEOPLE group](#)
- [Product introduction](#)
- [Pneumatic components](#)
- [Pneumatic valves](#)
- [Solenoid valve](#)
- [Pneumatic cylinders](#)
- [Air preparation](#)
- [Pneumatic Fittings](#)
- [Pneumatic accessories](#)
- [Pneumatic equipments](#)
- [Pneumatic parts](#)
- [Industry News](#)
- [Technical support](#)
- [Pneumatic standards](#)
- [Events](#)
- [Contact Us](#)

### People website search

### Pneumatic products

- [S Air Treatment Component](#)
- [A Air Treatment Component](#)

### New products

### Solenoid Valve Features :

- 1) Adopts integral slot throttle structure
- 2) Structure type: guiding valve type
- 3) Material: aluminum, stainless steel, nitric rubber
- 4) Temperature: 0 - 80°C
- 5) Working pressure: 0 - 1MPa
- 6) Voltage: DC 24V, AC 24V / 110V / 220V (50 / 60Hz)
- 7) Level of protection: IP54
- 8) Valve hole is processed with special high precision finishing technique
- 9) Widely applied to [pneumatic](#) systems

**Tags:** [solenoid valve](#) [3V solenoid valve](#)

| [Solenoid valve](#) | [TrackBack](#)

[« 3V300 Series Solenoid Valve](#)

[3V100 Series Solenoid Valve »](#)

#### **+** Related pneumatic products:

- [VF Series Solenoid Valve](#)
- [2V Series Solenoid Valve](#)
- [2W Series Solenoid Valve](#)
- [3V300 Series Solenoid Valve](#)
- [Solenoid Valve](#)

---

[About us](#) | [Sitemap](#) | [Copyright](#) | [Help](#) | [Cooperate](#) | [Down](#) | [Guestbook](#) | [Contact us](#)

Copyright 2007 **China PEOPLE pneumatic equipment Co., Ltd** Some Rights Reserved.